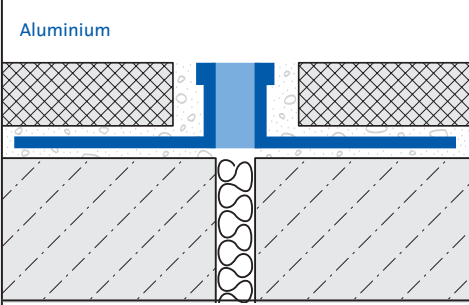
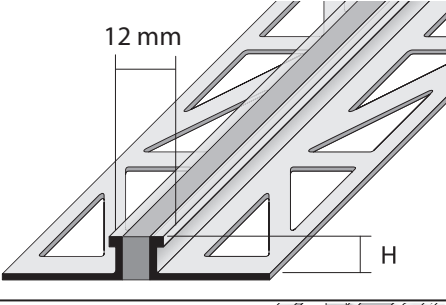
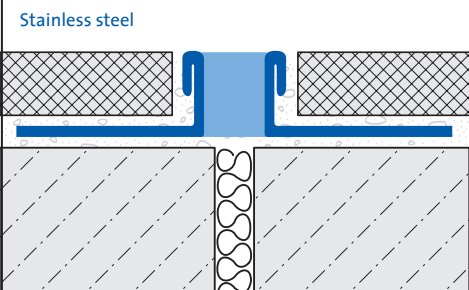
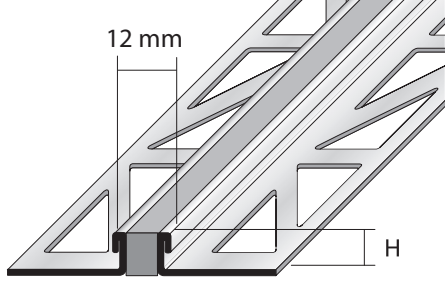


DURAFLEX Colour

Stainless steel (V2A), Aluminium

Reference	Aluminium: DFA C-... Stainless steel: DFE C-...	
Product group	Expansion joint profiles and movement joint profiles	
Height	2 / 3 / 4.5 / 6 / 8 / 9 / 10 / 11 / 12.5 / 15 / 16.5 / 18.5 / 20 / 22 / 25 mm	
Width	12 mm	
Width infill	Stainless Steel / Z-Flex: 7 mm, Aluminum: 6 mm	
Length	250 cm	
Material	Profile: Stainless steel V2A, Aluminium Infill: Epoxy-Compound	
Properties	<p>Movement horizontal: Stainless steel / Z-FLEX: +/- 2.1 mm; Aluminium: +/- 1.8 mm</p> <p>Load-bearing capacity: approved for pedestrians, cars and forklifts (Varies by material and installation)</p> <p>Fire resistance: B1 (hardly inflammable) in accordance with DIN EN 13501-1</p> <p>Chemical resistance: average resistance to acids and alkaline</p>	
Delivery	Delivery time: approximately 3 weeks	
Drawing	 <p>Aluminium</p>	 <p>12 mm</p> <p>H</p>
	 <p>Stainless steel</p>	 <p>12 mm</p> <p>H</p>